CRIMPING | SERVICE | P20HPZ

Electrical Pump

Hand Pump

Pneumatic Pump

P20HPZ

TECHNICAL DATA	
Max Hydraulic Hose	1 1/4" 4 wire
Crimping Range (mm)	4-65
Die Type	S6
Master Die Length (mm)	64
Max Opening (mm) [1]	+25
Hand Pump	Hand Pump or Air Pump
Crimping Force (KN)	2000
DIMENSIONS (LxWxH)	
Machine (mm)	200x250x310
Machine (inch)	7.9x9.8x12.2
Packaged (mm)	640x510x430
Packaged (inch)	25.2x20.1x16.9
WEIGHT	
Machine (kg/lbs)	45/99
Packaged (kg/lbs)	60/132

*** ACCORDING TO THE FITTING.**





1) Maximum opening is the total die travel.Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

FEATURES
Extreme Portable 1 1/4" Crimper
No electricity required
Optional Enerpac Hand Pump or Air Pump
Complete Die Set

OPTIONS
220V 1 Phase / 400V 3 Phase electrical pump
Pneumatic Pump
Custmized Die sets
Custmized Logo

CONTROL
Micro Dail

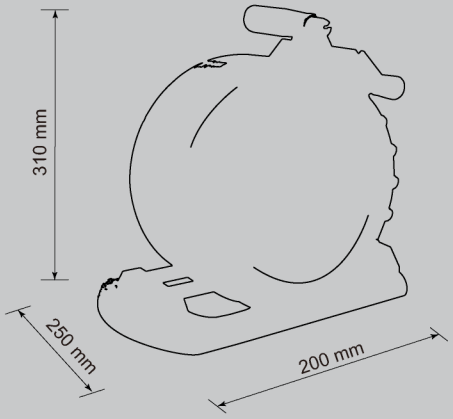

DIE SET 20-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
*18506/10	10	55	10.0-12.0
*18506/12	12	55	12.0-14.0
18506/14	14	55	14.0-17.0
18506/17	17	55	17.0-20.0
18506/20	20	55	20.0-24.0
18506/24	24	55	24.0-28.0
18506/28	28	75	28.0-32.0
18506/32	32	75	32.0-36.0
18506/36	36	75	36.0-40.0
18506/40	40	90	40.0-44.0
18506/44	44	90	44.0-50.0
18506/50	50	90	50.0-52.0
*18506/52	52	90	52.0-58.0
*18506/58	58	90	58.0-64.0

* Optional die sets at additional cost

Products images & Specifications may alter prior official notice at any time.